


GIP

1013N Horizontal Shaft Impact Crusher

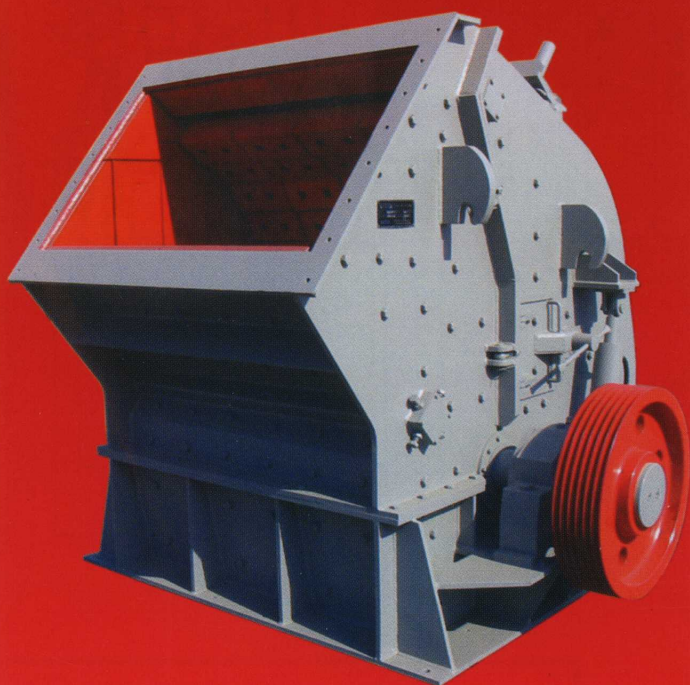

The Affordable Alternative in New Crushing Equipment

Standard Features

Heavy-duty, high inertia, semi-enclosed, balanced rotor

Newly designed wedge type rotor, will make blowbar removal safer and easier

Specially designed, impeller bar design to allow extended life

Rotor locking system for safer and quicker rotor maintenance

Large self-aligning spherical roller bearings with labyrinth seals

Hydraulically opened rear section for easier access to rotor and impact curtains

Hydraulically adjustable impact curtains

Quick and accessible breaker bars for easy replacement and repositioning

Inspection doors in key areas

Large, clear discharge opening

Optional Features

Electric motor

Drive sheave and bushing



The Affordable Alternative in New Crushing Equipment

Specifications

Feed opening (length × width) 55" × 32"

Maximum feed size 20"

Production range 100 to 170 TPH

Required horsepower 150 ~ 200 HP

Rotor speed range 500 to 800 RPM

Rotor width 54"

Rotor diameter 40"

Discharge setting 2" minus

Approximate weight 28,600 LBS

Impeller bar

Number 8

Weight 378 LBS each

Breaker plate liners

Number 40

Weight 51 LBS each

Bearing size 180 mm

